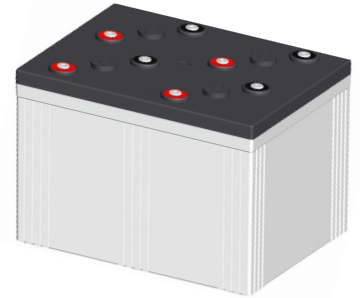


**Specification**

Nominal Voltage	2V	
Nominal Capacity(10HR)	2000.0AH	
Dimensions	Length	490±3mm (19.29 inches)
	Width	350±3mm (13.78 inches)
	Container Height	339±3mm (13.35 inches)
	Total Height (with Terminal)	349±3mm (13.74 inches)
Approx Weight	Approx 124.0Kg (273.4lbs)	
Terminal	T11	
Container Material	ABS	
Rated Capacity	2100.0AH/105.0A	(20hr, 1.80V/cell, 25°C/77°F)
	2000.0AH/200.0A	(10hr, 1.80V/cell, 25°C/77°F)
	1740.0AH/348.0A	(5hr, 1.75V/cell, 25°C/77°F)
	1512.0AH/504.0A	(3hr, 1.75V/cell, 25°C/77°F)
	1214.0AH/1214.0A	(1hr, 1.60V/cell, 25°C/77°F)
Max. Discharge Current	16000A (5s)	
Internal Resistance	Approx 0.28mΩ	
Operating Temp. Range	Discharge :	-15~50°C (5~122°F)
	Charge :	0~40°C (32~104°F)
	Storage :	-15~40°C (5~104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Cycle Use	Initial Charging Current less than 600.0A. Voltage 2.4V~2.5V at 25°C(77°F)Temp. Coefficient -5mV/°C	
	No limit on Initial Charging Current Voltage 2.25V~2.3V at 25°C(77°F)Temp. Coefficient -3mV/°C	
Standby Use		
Capacity affected by Temperature	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	GFM series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	


**Applications**

- ◆ Tele-communication central station(wired or cellular)
- ◆ Power system communication, military communication, etc.
- ◆ Network communication including: data transmission, television signal transmission, etc.
- ◆ Uninterruptable Power System (UPS- for Telecom)


**Constant Current Discharge (Amperes) at 25°C (77°F)**



F.V/Time	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	1533.6	1216.0	998.0	599.5	463.3	380.5	324.0	283.0	228.0	191.0	101.3
1.80V/cell	1645.5	1279.3	1060.0	632.4	486.0	397.5	337.6	295.7	236.8	200.0	105.0
1.75V/cell	1742.5	1345.2	1106.0	658.6	504.0	411.0	348.0	302.7	241.3	202.0	106.1
1.70V/cell	1828.4	1395.9	1144.7	678.0	517.3	420.0	354.0	308.0	245.0	204.0	107.1
1.65V/cell	1917.9	1456.7	1186.0	698.4	528.7	429.0	361.6	313.3	248.5	206.6	108.5
1.60V/cell	/	1496.0	1214.0	715.0	540.0	435.0	366.8	317.7	251.8	209.0	109.7

**Constant Power Discharge (Watts) at 25°C (77°F)**


F.V/Time	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	2930.8	2338.0	1930.4	1166.0	905.5	746.3	638.3	559.2	452.4	379.9	201.7
1.80V/cell	3119.4	2443.5	2038.9	1224.3	945.3	777.0	662.1	581.9	468.4	397.2	208.7
1.75V/cell	3278.2	2554.3	2118.0	1269.9	977.8	800.6	680.2	593.8	476.2	400.7	210.6
1.70V/cell	3410.8	2632.0	2180.6	1301.8	999.9	814.8	689.9	603.4	483.1	404.4	212.5
1.65V/cell	3551.2	2731.3	2246.4	1335.3	1017.3	829.5	702.2	611.9	488.8	408.9	215.0
1.60V/cell	/	2778.8	2283.5	1358.5	1033.7	837.4	709.5	618.5	494.2	412.9	217.1

## Dimensions


### T11 Terminal Unit: mm [inches]

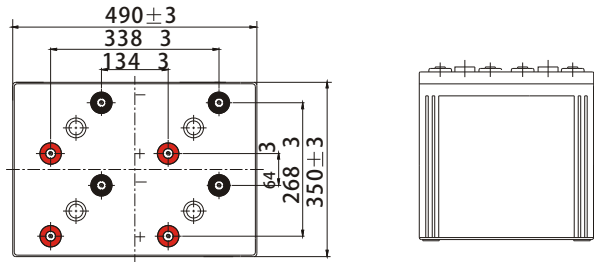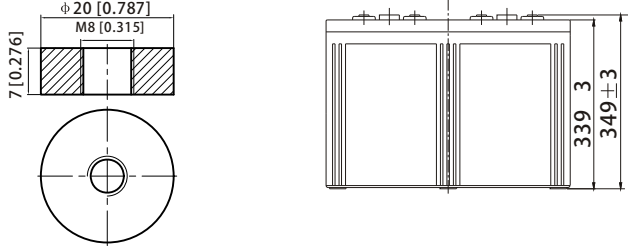


## Discharge Characteristics

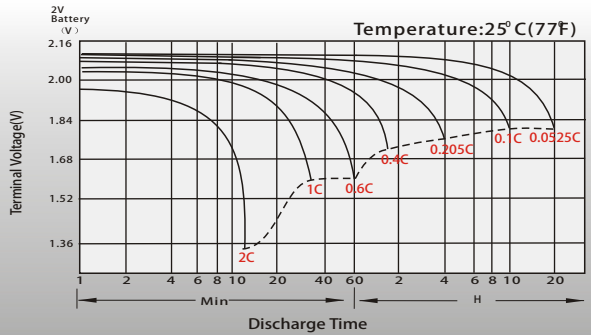


## Float Charging Characteristics

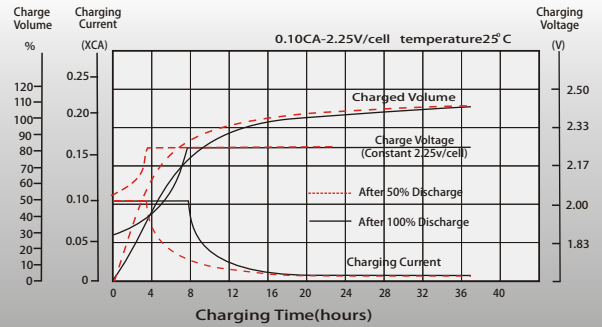


## Temperature Effects in Relation to Battery Capacity

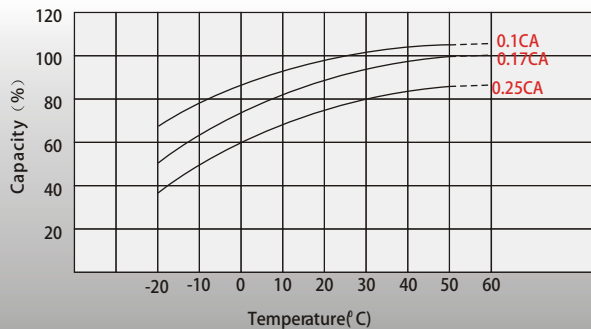


## Effect of Temperature on Long Term Float Life

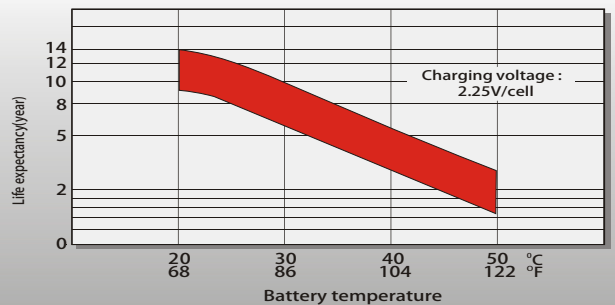

## Cycle Life in Relation to Depth of Discharge

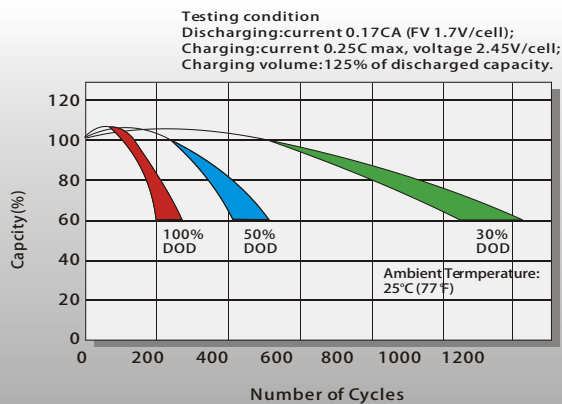

## Self Discharge Characteristics

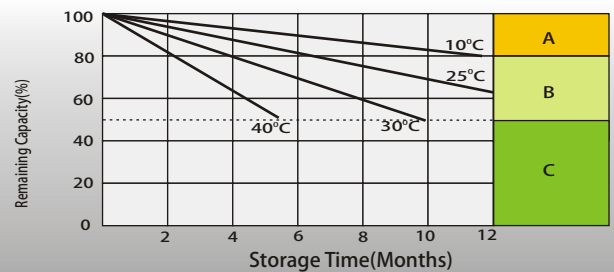

- A** No supplementary charge required (Carry out supplementary charge before use if 100% capacity is required.)
- B** Supplementary charge required before use. Optional charging way as below:  
1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.  
2. Charged for above 20 hours at limited current 0.25CA and constant voltage 2.45V/cell.  
3. Charged for 8~10 hours at limited current 0.05CA.
- C** Supplementary charge may often fail to recover the capacity. The battery should never be left standing till this is reached.

## Contact US

### Greensun Solar Energy Tech Co., Limited

\* Add: No 2000 Changjiang West Road, Shushan District Hefei China  
 \* Email: info@greensunpv.com  
 \* Phone: 0551-69866216 Fax: 0551-69866218 Mob: 0086-158 5511 0194  
 \* Web: <https://www.greensunpv.com> & <https://greensunpv.en.alibaba.com>